UP-2017-0097 -SI

00

BALTIMORE COUNTY

DEPARTMENT OF PERMITS, APPROVALS & INSPECTIONS

111 WEST CHESAPEAKE AVENUE TOWSON, MD 21204

410-887-3391


The applicant is authorized

to affirm that there are no current violations at this site pursuant to Section 112.7 BCC

* * * * * * * * * * * * * * * * * * *	\$500

SIGN USE PERMIT

Permit Fees are Non-Refundable; Make Check Payable to "Baltimore County, Maryland" Initials
PROPERTY ADDRESS 9202 this icidelphia to ZIP CODE 21237
BUSINESS NAMEROSE da le Baptist Church ZONING Ph3,5/BL
OWNER'S NAME NO. HISTORIC DISTRICT Yes No.
MAILING ADDRESS 202 Philadelphia To
APPLICANT/OWNER'S AGENT Heather Davis PHONE NO. 410 255-6400
SIGN COMPANY NAME O CODIC PHONE NO. 410 255 6 40
TYPE OF SIGN: Window Sign TAX ACCOUNT NO. 170 /000 / 5 6 0
Temporary- Including Real Estate/Construction/Event Temporary Signs in the Last Year: Yes No
Permanent Changeable Copy Wall Face Change Only Non-Illuminated
Freestanding Pylon Monument Illuminated (separate electrical permit required)
Size:
Property Line/Street Right-of-Way Setbacks: front <u>27</u> , sides <u>33</u> and <u>29</u> , and rear <u>4100</u> .
NOTE: A construction plan, drawn to scale and clearly showing that all requirements have been met, must be attached; a site plan also
must be attached for freestanding signs.
Table of Sign Regulations: 450.4.Attachment 1, 1 An Electronic Changeable Copy Sign may only have a maximum Frequency of one instantaneous message change per 15 second cycle. 450.6.B.3 Changeable copy signs must operate at a constant intensity and not give the appearance of movement by flashing, blinking, strobing, scrolling, oscillating, or alternating lights. PROHIBITIONS: including roof signs (Sections 450.5.B.7 and 450.6.A, Baltimore County Zoning Regulations): 1. Signs cannot impair motorist's clear view of traffic or government signs. All signs are subject to Section 102.5, BCZR. 2. Signs cannot imitate or resemble government signs, except for private traffic control and notice signs. 3. Signs cannot be placed in or project into or above street right of way or governmental property. 4. Sign or framework cannot obstruct window or opening for light and air or access to building, fire hydrant, or stand pipe. 5. Vehicle cannot be parked for the purpose of displaying an attached sign. 6. Except for flags exempted, flags, pennants, ribbons, streamers, tethered balloons, laser projections, and similar objects are prohibited. 7. Portable signs are prohibited, except for A-frame and sandwich board signs issued a use permit in B.M. – C.T. zones. 8. There can be no display or simulation of moving parts or message, except for an outdoor advertising sign with tri-vision, a changeable copy sign, or a thermometer, barometer, weather vane, barber pole, or clock. 9. No sign may emit sound Work Description (including number of signs, special conditions, materials, locations and size): The standard of Section 102.5, BCZR. CORNER LOT
OWNER/AGENT CERTIFICATION I solemnly affirm under the penalties of perjury and upon personal knowledge that the contents of the above are true and further agree to locate the proposed sign such that it will not violate Baltimore County laws and regulations. Signature Date Print/Type Name P
Require Planning Signature Date
Copies: White-Office; Yellow- Applicant (keep this Copy for your permanent records) REV 10/14 Authority under Section 500.4, BGZR PAI Approval (SIGN ONLY) Signature Authority under Section 500.4, BGZR PAI Approval (SIGN ONLY) Signature Date

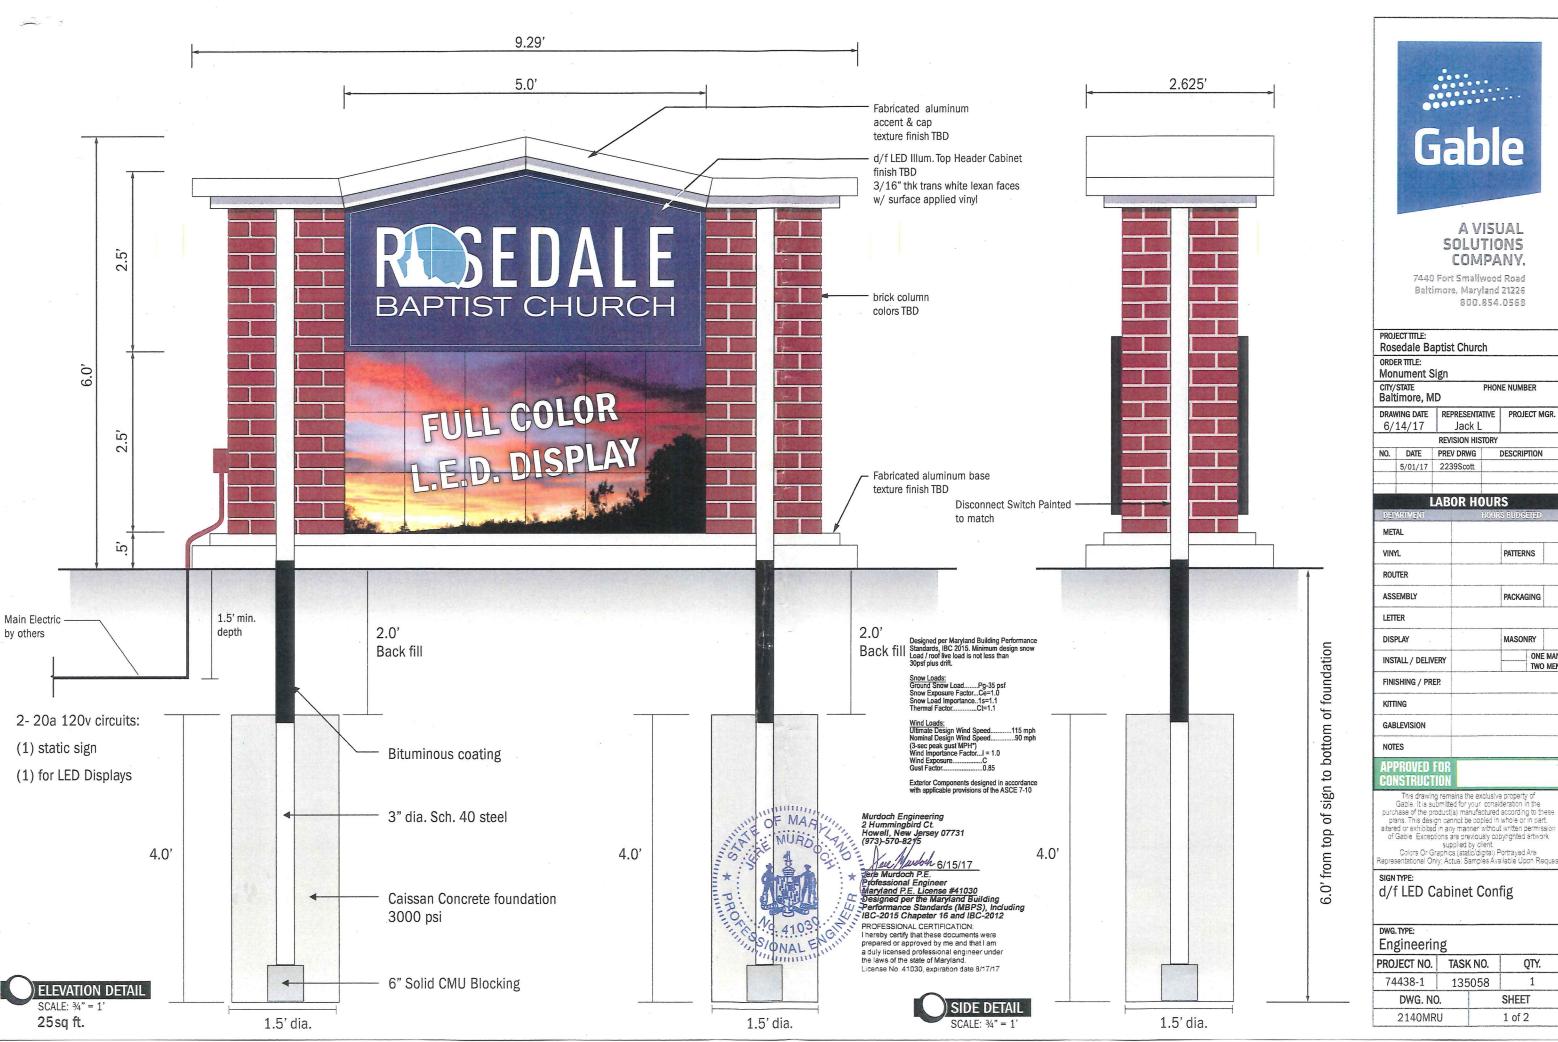



A VISUAL SOLUTIONS COMPANY.

Baltimore, Maryland 21226 800.854.0568

DRAWING DATE		RE	REPRESENTATIVE Jack L		PROJ	ECT M	IGR.
6/14/17							
		REV	ISION HIS	TORY			
NO. DATE		PRE	PREV DRWG		DESCRIPTION		
	5/01/17	223	39Scott				
		LAB	OR HO				
DE	ARIMENT			IOUR	s BUDG	ENED	
MET	TAL						
VINYL					PATTER	NS	
ROL	ЛER						
ASSEMBLY		-			PACKA	GING	
LET	TER						
DISPLAY					MASON	NRY	
INS	TALL / DELIN	/ERY				ONE	MAN
FINI	SHING / PR	EP.			la come consiste care	Acronius and	
КП	ING						-
GAE	BLEVISION						
						-	

supplied by client.
Colors Or Graphics (static/digital) Portrayed Are
Representational Only; Actual Samples Available Upon Request

d/f LED Cabinet Config

TASK NO. QTY. 135058 1 SHEET 1 of 2



ENGINEERING GENERAL NOTES:

- 1. Design, fabrication and construction shall conform to the following codes and specifications:
- (a) Current International Building Code Edition
- (b) American Institute of Steel Construction "Manual of Steel Construction" (14th edition). (c) American Welding Society (AWS DI.I-2010)
- (d) Specifications for Aluminum Structures by the Aluminum Association (Current Edition).
- 2.) Aluminum Requirements (a) Tubing, Plates, rolled shapes and bars shall be 6061-T6, or equal'
- (b) Aluminum tube wall thickness shall be a minimum of 1/8", unless otherwise noted.
- (c) Welding shall be in accordance with AWS D1.2
- (d) Aluminum alloy filler 4043 shall be used in all tube and structural welds
- (e) Fillet weld size shall not exceed thinnest member thickness of joined sections
- (f) Welding process GMAW or GTAW shall be in accordance with AWS D1.2 (g) All Aluminum bolted connections shall be made with Stainless Steel ASTM A316 bolts
- (h) Field connections and damaged or abraded areas of protective coating shall be touch-up painted with compatible material.
- (i) Provide neoprene gaskets between dissimilar metals
- (j) Coat aluminum with bituminous coating where in contact with earth and concrete to prevent
- 3. Al field welds shall comply with AWS code for procedures, appearance and quality of welds. 4. Footi g Requirements
- 4. roou g nequiements
 (a) Minimum concre ength shall be 3,000 psi
 (b) Provide a minimum of 3" clearance from bottom of footing to bottom of direct buried steel
- (c) Co crete design and construction to be in accordance with ACI 318-11
- (d) Concrete poured in strained earth excavations must cure under proper conditions for a
- Minimum of 2 days prior to the installation of sign cabinet structure. (e) Footing design ass ooting shall be excavated and poured in undisturbed natural earth,
- capable of withstanding a minimum 1,500 psf design bearing pressure, and 150 lbs/sf per ft. of depth lateral bearing pressure based on soil data obtained from the USGS Soil Survey.

 (f) If clay, silty clay, organic or fill is encountered upon excavation, contact Murdoch Engineering
- For footing design modification prior to construction.









A VISUAL **SOLUTIONS** COMPANY.

7440 Fort Smallwood Road Baltimore, Maryland 21226 800.854.0568

	ectime: edale Ba	aptist Churcl	n		
	RTTLE: nument S	Sign			
	state imore, M		PHON	E NUMBER	
DRAWING DATE 6/14/17		REPRESENTATIVE Jack L		PROJECT MGF	
		REVISION HIST	ORY		
NO.	DATE	PREV DRWG	DRWG DESCRIPTION		
	5/01/17	2239Scott			
\neg	3,01/11	22000000			

LABOR F	lours	
DEPARTMENT	HOURS BUDGETED	
METAL		
VINYL	PATTERNS	
ROUTER		
ASSEMBLY	PACKAGING	
LETTER		
DISPLAY	MASONRY	
INSTALL / DELIVERY	ONE	
FINISHING / PREP.		
KITTING		
GABLEVISION		
NOTES		-
APPROVED FOR CONSTRUCTION		

This drawing remains the exclusive property of Gable. It is submitted for your consideration in the purchase of the product(s) manufactured according to these plans. This design cannot be copied in whole or in part, altered or extilibited in any manner without written permission of Gable Exceptions are previously copyrighted artwork supplied by client.

Colors Or Graphics (statio/digital) Portrayed Are.

Representational Only, Actual Samples Available Upon Request.

d/f LED Cabinet Config

DWG. TYPE: Engineering PROJECT NO. TASK NO. QTY. 74438-1 135058 as noted SHEET DWG. NO. 2140MRU 2 of 2

